
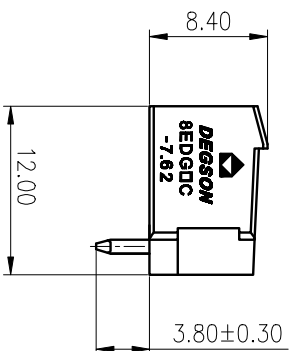
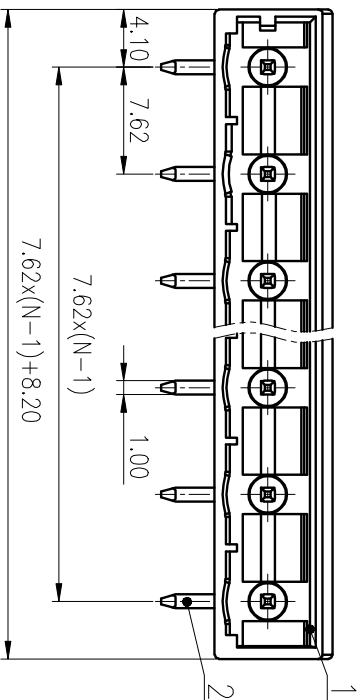
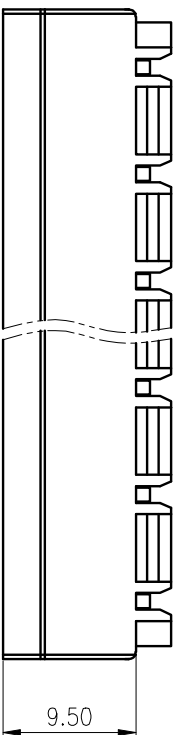


PCB LAYOUT  
7.62x(N-1)+8.20

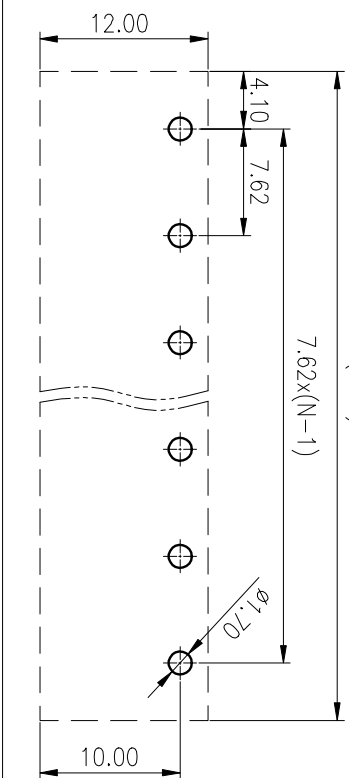

精度等级/General Tolerances(mm)												0.1/1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	±Z	
~	~	~	~	~	~	~	~	~	~	~	~	>500		
3	6	10	18	30	50	80	120	180	280	315	400	500		
±0.12		±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin header	Copper	
1	Housing	PA66	UL94V-0

UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/151	150/75	300/150
IEC 标准 /IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	400/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
额定/Pitch(mm)/线数/极数/Poles	7.62/N=02~12P		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	PANTONE 7534U		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/		
STATUS:	/		
Appd: LanChH	2020.03.20	NAME:	8EDGRC-7.62-XXP-11-01A(H)
CHKD:GongYzh	2020.03.20	DRAWING NO.:	10001540
DRT: YINDK	2020.03.20	TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 2:1	REV	TO
					(mm)			
					(inch)			

D

C

B

A

D

C

B

A

1

2

3

4

5

6