
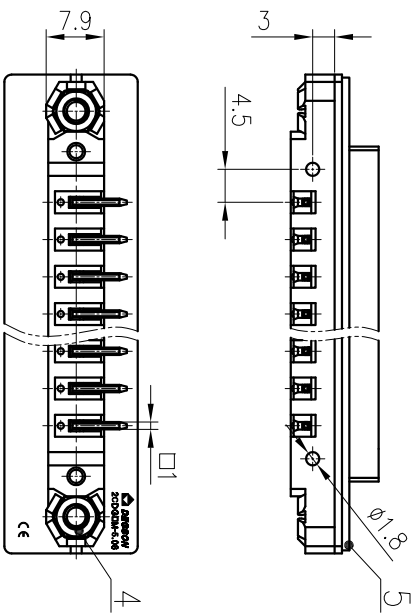
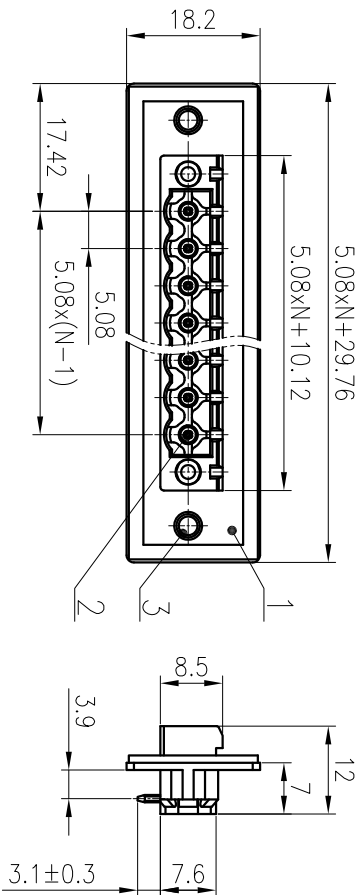


PCB LAYOUT

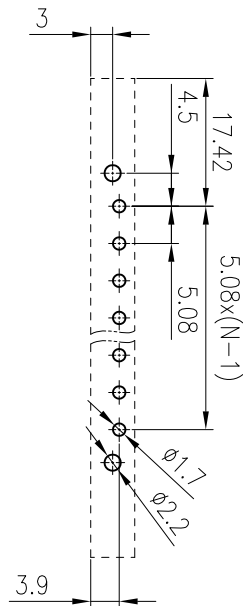

| 公差/General Tolerances(mm) | |
|---------------------------|-------|
| 0 | >3 |
| ~2 | ~6 |
| 3 | ~10 |
| ~6 | ~18 |
| 10 | ~30 |
| ~18 | ~50 |
| ~30 | ~80 |
| ~50 | ~120 |
| ~80 | ~180 |
| ~120 | ~250 |
| ~180 | ~315 |
| ~250 | ~400 |
| ~315 | ~500 |
| ~400 | ~500 |
| ~500 | ~2.50 |
| ±0.12 | ±0.18 |
| ±0.22 | ±0.26 |
| ±0.31 | ±0.37 |
| ±0.57 | ±0.80 |
| ±1.05 | ±1.15 |
| ±1.60 | ±2.20 |
| ±2.50 | ±2.50 |
| ±2 | ±2 |

| | | | |
|---|--------------|---------------|--------------|
| 5 | Dust mat | EVA | |
| 4 | Nut 2 | Steel | M3/Zn Plated |
| 3 | Nut 1 | Copper alloy | M2.5 |
| 2 | Pin | Copper | Sn Plated |
| 1 | Housing | PA66 | UL94V-0 |
| ITEM | NAME OF PART | MATERIAL | NOTES |
| UL 标准/UL Standard: | | B | C |
| 额定电压/Rated Voltage(V) | Current(A) | 300/15 | 300/10 |
| FC 标准/IEC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级/Pollution Degree | | III/3 | III/2 |
| 额定电压/电流/Rated Voltage(V)/Current(A) | | 250/12 | 320/12 |
| 额定脉冲电压/峰值电压/Rate Impulse Voltage(KV) | | 4 | 4 |
| 间距/Pitch(mm) | 线数范围/Poles | 5.08/N=02~22P | |
| 使用温度范围/Operating Temperature(°C) | | -40~+105 | |
| 符合RoHS环保要求/Conform to RoHS | | Yes | |

MATERIAL: /

STATUS: /

APPD: /

CHKD: /

DRAFT: LYP 2016.08.22

SIZE: A4

TYPE: CUSTOMER DRAWING

SURFACE: /

NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 2CDGRM-5.08-C02

SCALE: 1:1

REV T1

1/1

| REV | ECN | DESCRIPTION | DRAFT | DATE |
|-----|-----|----------------------|--------|------------|
| 1 | | 1xModify the drawing | Yin DK | 2020.12.17 |