

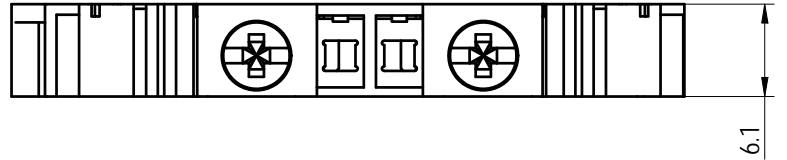
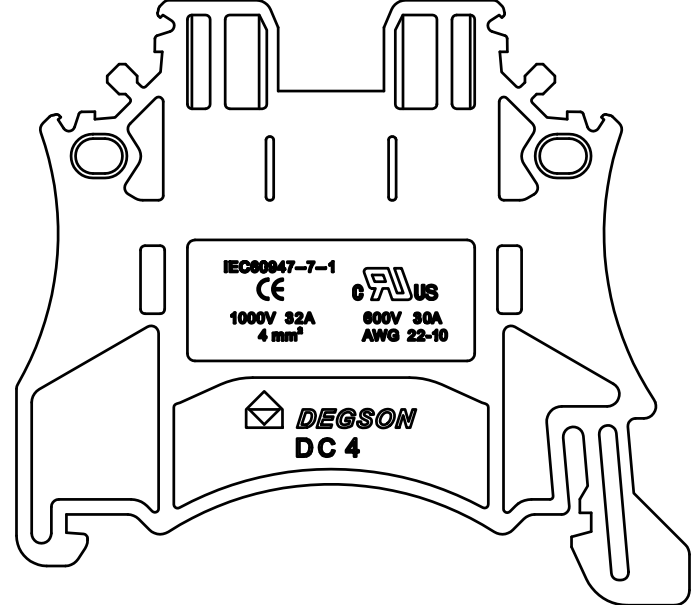


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent. 未经授权复制或传播本文件内容，以及将本文件内容用于任何目的，均属于侵权行为。Degson 保留所有权利。如有侵犯，请即通知，我们将依法追究。



6.1

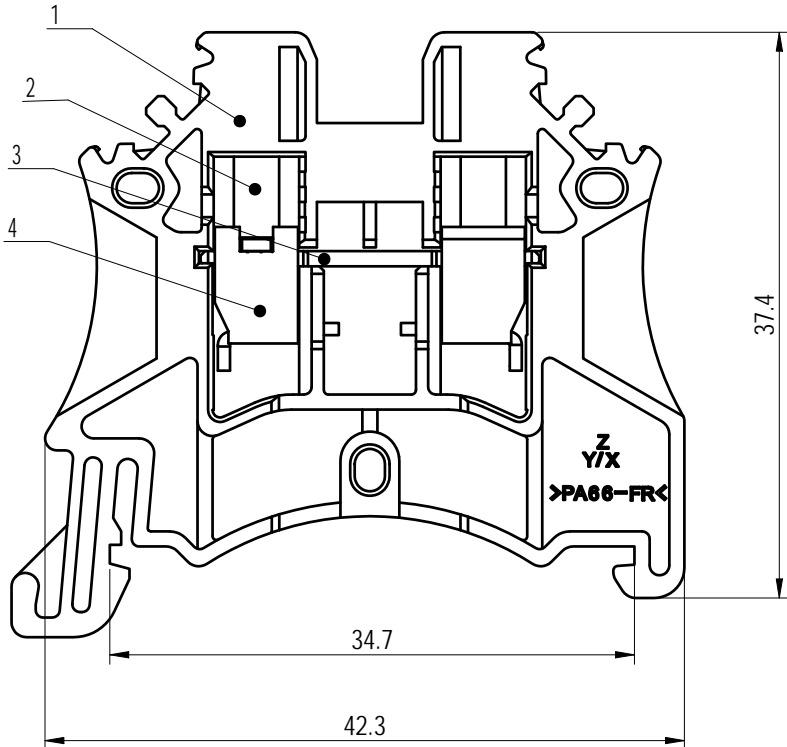

公差/General tolerances (mm)													0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'
UL 标准/UL Standard:											B	C	D	
额定电压/电流/Rated Voltage(V)/Current(A)											600/30	600/30	/	
IEC 标准/IEC Standard:														
过压类别/Ovoltage Category/污染等级/Pollution Degree											III/3	III/2	II/2	
额定电压/电流/Rated Voltage(V)/Current(A)											1000/32	/	/	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											8	/	/	
螺丝扭矩/Torque Tightening(N·m/Lb.in)											M3, 0.65/6			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)											22-10/0.5-4			
剥线长度/Stripping length(mm)											8-9			
使用温度范围/Operating temperature(°C)											-40~+105			
符合RoHS环保要求/Conform to RoHS											Yes			

4	Cage	Steel	M3/Zn Plated
3	Current carrier	Copper	Sn Plated
2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL: /	SURFACE/COLOR: /	
		MAT NO./REV: /	MAT STATUS: /	
APPD: Peng M	2022.08.20	NAME		
CHKD: Gao WG	2022.08.20	DC4-01P-1Y-12A(H)		
DRFT: Huang RJ	2022.08.20			
DRAWING NO. /	TYPE	DRAWING STATUS	SCALE	SHEET
/	CUSTOMER DRAWING	/	2:1	1/1

00	/	/	Huang RJ	2022.08.20
REV	ECN	DESCRIPTION	DRFT	DATE