
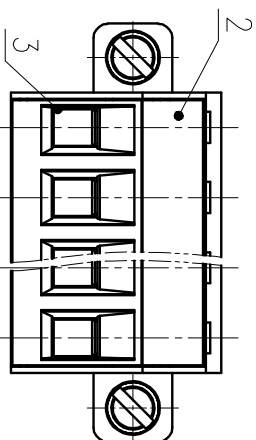

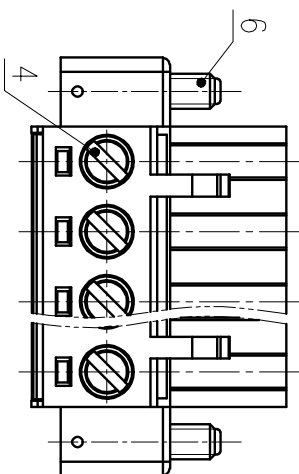
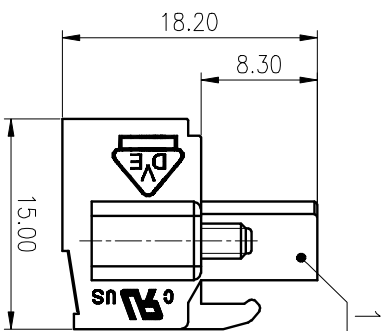
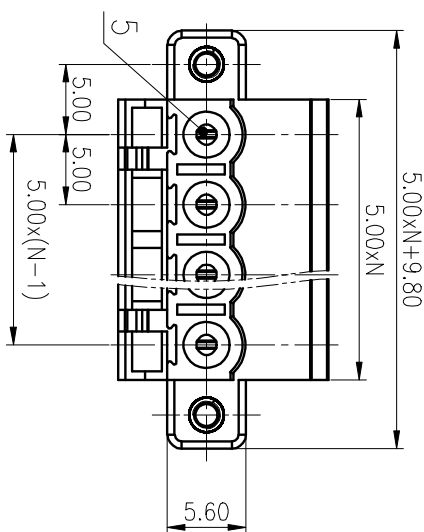


02P



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	DRAWING NO.: 10002079	
APPD: LanChH	2020.06.23	NAME: 2EDGKFM-5.0-XXP-1Y-1000A(H)	
CHKD: YUZH	2020.06.23	DRAFT: BotH 2020.06.23	
DRAFT: BotH	2020.06.23	TYPE: CUSTOMER DRAWING	
REV	ECN	DESCRIPTION	DRAFT DATE
1	2	3	4
1/1			SCALE: 2:1 SHEET

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Cage	Copper Alloy	M3/Ni Plated
4	Screw 1	Steel	M3/Zn Plated
5	Clamp	Copper Alloy	Sn Plated
6	Screw 2	Steel	M2.5/Zn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:	III/2		
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/2		
额定电压/电流/Rated Voltage(V)/Current(A)	320/20		
额定冲击电压(kV)/Rate Impulse Voltage(kV)	4.0		
额定扭矩/Torque Tightening(N·m/Lbin)	M3, 0.5/4.43		
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~12		
间距/Pitch(mm)/线数范围/Poles	5.00/N=02~20P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		